



USB 56K/V92 Modem-Fax

Quick Installation Guide



1. Package Contents

- ☒ One V.92/V.44 USB 2.0 software modem
- ☒ Phone cable
- ☒ Quick Start Guide
- ☒ CD-Title with Windows' driver and user manual

2. Minimum System Requirement

- ☒ PC-based computer with Pentium II and above processor.
- ☒ One free USB Port.
- ☒ 64MB RAM or more.
- ☒ 20MB hard disk space (System files and modem drivers only).
- ☒ CD-ROM drive.
- ☒ Windows 98SE/ME/XP/2000/Vista Operating System


3. Hardware Installation

1. Turn the computer on.
2. Find an available USB 1.1/2.0 port on your PC.
3. Plug the modem into the USB port carefully until the modem is properly seated.
4. Plug one end of telephone cord into the **RJ11** Jack at the modem's bracket. Plug another end of the phone cord into the telephone wall Jack.
5. Up to now, the hardware installation is finished.

Windows XP :

■ Driver Installation :

1. Power on your computer to start Windows XP. Windows XP will detect the newly-installed modem and a “**Found New Hardware Wizard**” window will appear. Click “**Cancel**” to close the hardware wizard, then place your Driver CD into the CD-ROM drive.

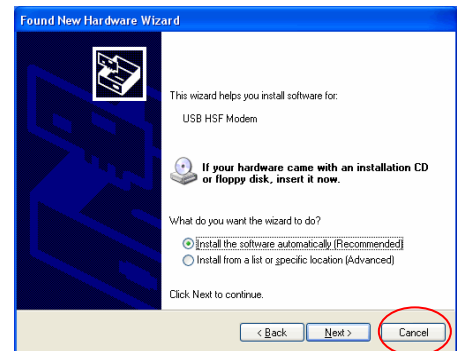

2. Windows system will automatically run the CD Set-Up Wizard. Please click “**Install Driver**”.




3. A “**Install Driver**” window will pop-up. Click “**Windows 2000&XP**” and Windows system will automatically install the driver!




4. If there is no error message appears during the driver installation, your modem has been set up properly and is functional.


5. Move your cursor as following sequence: **“Start”** → **“Settings”** → **“Control Panel”** and click **“System”**.

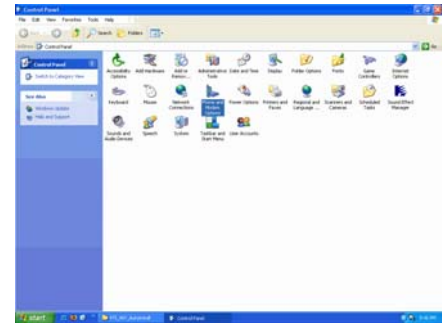

6. The following window will pop-up. Click the **“Hardware”** tab and select **“Device Manager”**.

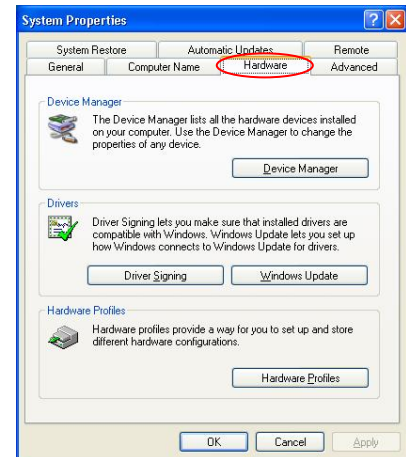


7. Click **“Modems”**. You can find **“Agere System USB 2.0 Soft Modem”**, if there is no error message, your modem has been set up properly and is functional.

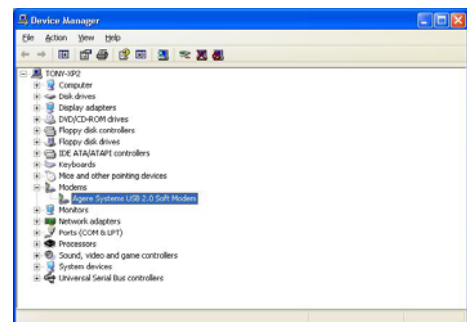


■ Setting up Internet connection

1. Move your cursor as following sequence: **“Start” → “Control Panel”** and then click on the **“Network Connection”** icon.

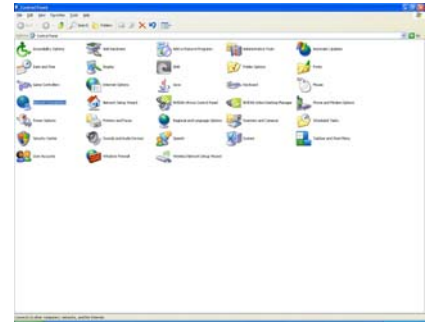


2. Click **“New Connection Wizard”** to continue.

Click
“New Connection Wizard”

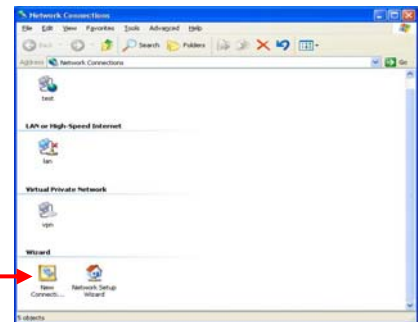

3. **“New Connection Wizard”** will pop-up during the driver installation process. Click **“Connect to the Internet”** and then click **“Next”** to continue.

Click
“Connect to the Internet”

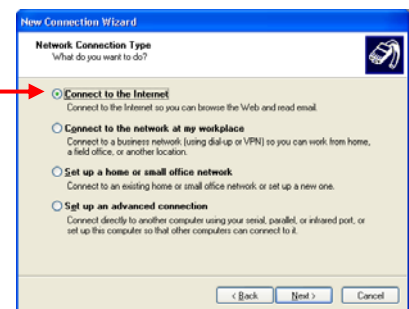

4. Select **“Set up my connection manually”** and click **“Next ”** to continue.

Click
“Set up my connection manually”




5. Select **“Connect using dial-up modem”** and click **“Next ”** to continue.

Click
“Connect using dial-up modem”



6. Enter manually the ISP Name and phone number to dial then click **“Next”** to continue. Check your ISP for the correct phone number and setting.

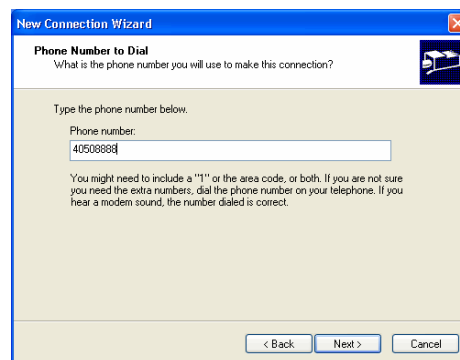


7. The following windows will pop-up. Manually enter your **“User name”** and **“Password”** which are provided by your ISP, then click **“Next”**.



8. Click **“Finish”** to confirm your setting.




9. Move your cursor as following sequence: **“Start” → “Settings” → “Network Connections”** then click on **“56K USB Modem Connection”**.

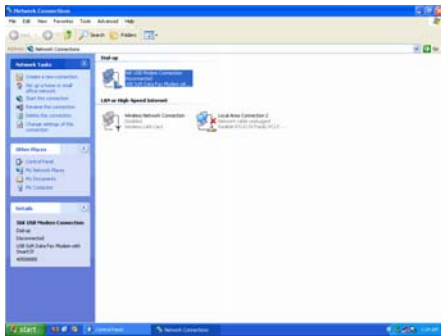

10. The following window will pop-up. Enter manually your **“User name”** and **“Password”** which are provided by your ISP, then click **“Dial”**.



11. The following connection and authentication icon will pop-up.

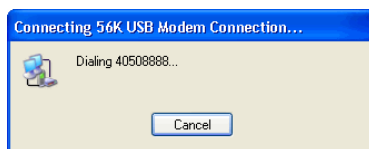


12. Launch your web browser, and enter the Google Web Address: **“www.google.com”** in the address field and press **“Enter”**. The following Google website index page will display on your screen. This shows that your 56K Modem connection is correctly set and access to the Internet is now available.




Windows Vista :

■ Driver Installation :


1. Power on your computer and plug the modem into the USB port. Windows Vista will automatically install device driver software.

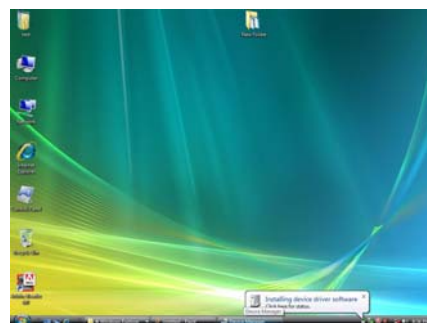


2. Windows system will automatically install the device driver and copy all the necessary files to your system.

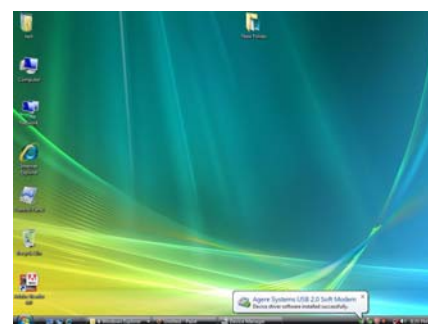


3. Move your cursor as following sequence: **“Start”** → **“Settings”** → **“Control Panel”** and click **“System”**.

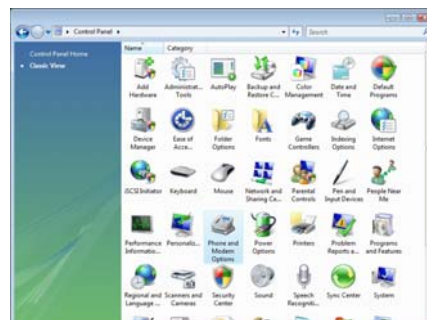

4. The following window will pop-up. Click **“Device Manager”**.

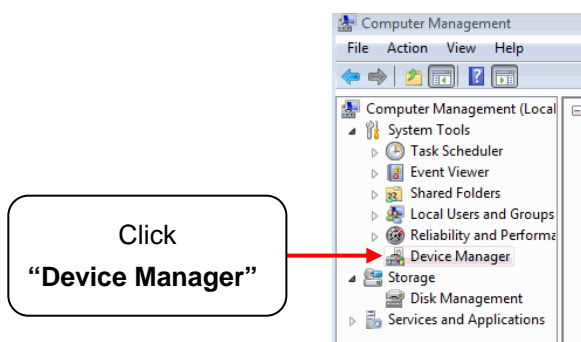

5. Click **“Modems”**. You can find **“Agere System USB 2.0 Soft Modem”**, if there is no error message, your modem has been set up properly and is functional.

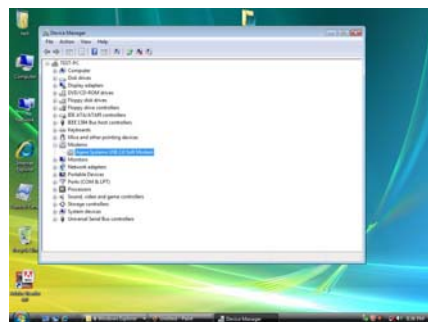

■ Setting up Internet connection


1. Move your cursor as following sequence: “**Start**” → “**Settings**” → “**Control Panel**” and click “**Network and Sharing Center**”.

Click “**Set up a connection or network**”.




2. Click “**Connect to the Internet**” in Control panel home.

Click
“**Connect to the Internet**”

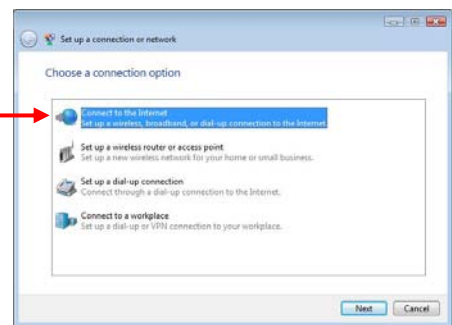

3. Click “**Dial-up**”

Click
“**Dial-up**”

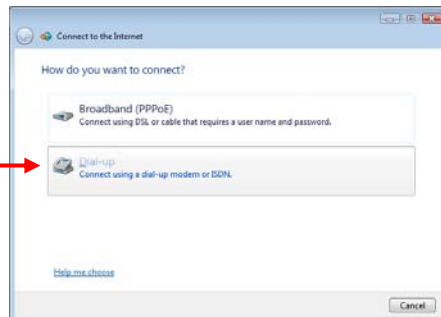

4. The following window will pop-up. Fill in the “**Dial-up phone number**”, “**User name**” and “**Password**” and click “**Connect**” to continue



5. Once you have successfully connected to the Internet, a connected icon will automatically appear in your Windows System task bar. This icon will light when receiving or transmitting data from or to Internet.